



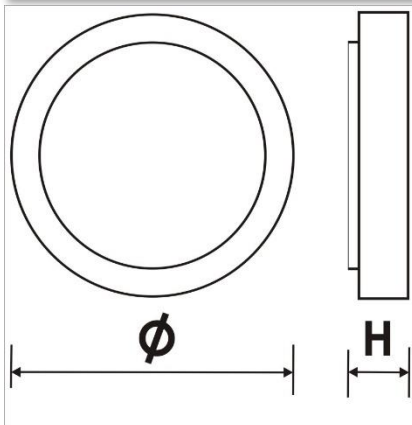

LED CEILING LAMP LCC

Modern ceiling lamp LCC 225 dedicated to stairwells and corridors.

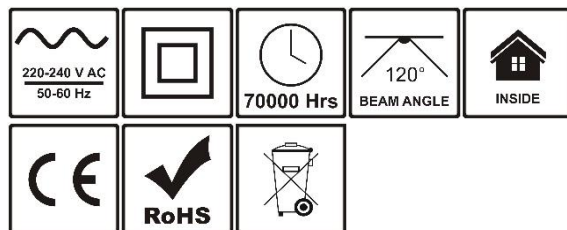

Characteristic:

LCC 225 – attractive new design and energy saving. Appealing design and long lifetime means that maintenance costs are kept to a minimum. LCC 250 can be wall- or ceiling-

mounted and is ideal for illumination of areas such as stairwells and corridors.

TYPE	LAMP FLUX (lm)	LOR	POWER (W)	CCT (K)	CRI (Ra)	DIMENSIONS (mm)
LCC 225 7W	900	0,65	7W	3000-6000	>80	225x50
LCC 225 11W M	1300	0,65	11W	3000-6000	>80	225x50
LCC 225 7W M	900	0,65	7W	3000-6000	>80	225x50
LCC 225 12W M+D	1300	0,65	3 - 12W	3000-6000	>80	225x50

SPECIFICATION

Electrical parameters :

Voltage 220-240 VAC 50/60 Hz
 Power factor $\geq 0,85$
 THD <15%


Working temperature $-20^{\circ}\text{C} - +50^{\circ}\text{C}$

Optical parameters :

Diffuser Milky, PMMA
 Beam angle Symmetrical

Mechanical parameters :

Housing Acrylic
 Mounting Wall, ceiling

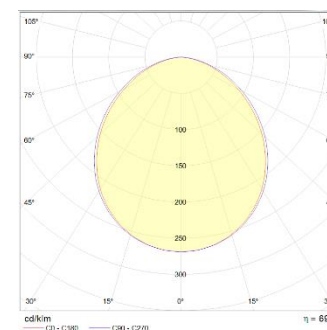

Kernel Electronics Co., Ltd.
 401A, Win-United Bldg. 207, Huanshizong Rd.
 Guangzhou, 510010 China
 phone: 0086 20 85620350
 Fax: 0086 20 36780474
www.kernelelectronics.com