




## LED DOWNLIGHT LDT

Downlight lamp LDT dedicated to offices and corridors.

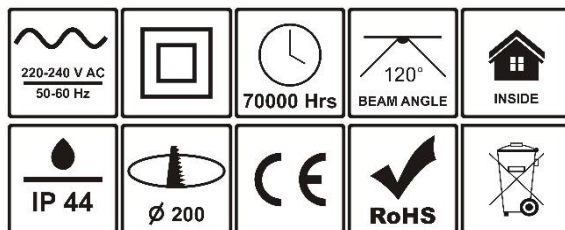

### Characteristic:

LDT – high-efficiency sustainable LED luminaire. LDT is a cost-efficient and sustainable downlight that can be used to replace conventional CFL downlights in general lighting applications. It features the latest LED technology, which enables extremely low power consumption while delivering consistent light output. The product’s long lifetime makes it a truly ideal lighting solution.

TYPE	LAMP FLUX (lm)	LOR	POWER (W)	CCT (K)	CRI (Ra)	DIMENSIONS (mm)
LDT 8 18W	2260	0,76	18W	3000-6000	>80	230x80
LDT 8 20W	2800	0,76	20W	3000-6000	>80	230x80
LDT 8 24W	3190	0,76	24W	3000-6000	>80	230x80

## SPECIFICATION

### Electrical parameters :

Voltage 220-240 VAC 50/60 Hz  
 Power factor ≥0,93  
 THD <15%


Working temperature -20°C - +50°C

### Optical parameters :

Diffuser Milky, PMMA  
 Beam angle Symetrical

### Mechanical parameters :

Housing Aluminium  
 Mounting Recessed



Kernel Electronics Co., Ltd.  
 401A, Win-United Bldg. 207, Huanshizong Rd.  
 Guangzhou, 510010 China  
 phone: 0086 20 85620350  
 Fax: 0086 20 36780474  
[www.kernelelectronics.com](http://www.kernelelectronics.com)